


LIABILITY • ENERGY EFFICIENCY • GUARANTEE





LIABILITY • ENERGY EFFICIENCY • GUARANTEE

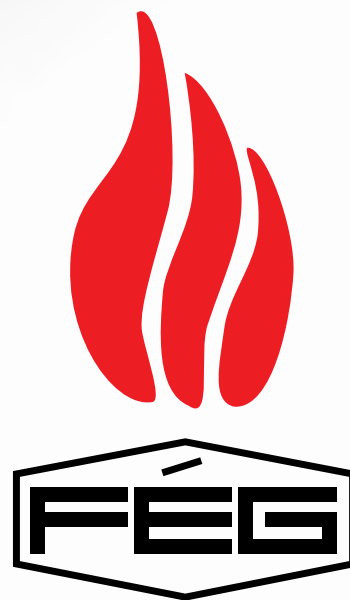

| | |
|-----------------------------------|----|
| F8.60 ErP wall heater | 2 |
| F8.60 ErP Retro wall heater | 2 |
| GF26 ErP wall heater | 6 |
| GF36 ErP wall heater | 6 |
| Zeusz F8.50 ErP wall heater | 8 |
| Zeusz GF35 ErP wall heater | 10 |
| F8.50 ErP wall heater | 12 |
| GF35 ErP wall heater | 14 |
| GF40 ErP wall heater | 14 |
| GF25 ErP wall heater | 16 |
| GF30 ErP wall heater | 16 |
| EURO FK25 wall heater | 18 |

F8.60EF ErP WALL HEATER




| Device model: | F8.60EF ErP | |
|----------------------------------|-----------------|--------|
| Fuel | Natural gas | LP gas |
| Max. rated heat output (KW) | 5.8 | 5.9 |
| Efficiency (%) | 94 | 93 |
| Energy efficiency class: | A | |
| Space heated (m ³) : | 80-140 | |
| Height (mm): | 725 | |
| Depth (mm): | 280+20* | |
| Width (mm): | 770 | |
| Weight (kg) : | 28.5 | |
| Gas connection: | G1/2" | |
| Flue outlet type: | direct vent | |
| Flue outlet diameter (mm): | 97 | |
| Material of combustion chamber: | steel | |
| Colours: | beige and white | |

*Depth of thermostat



F8.60EF ErP RETRO WALL HEATER



LIABILITY • ENERGY EFFICIENCY • GUARANTEE




| Device model: | F8.60EF ErP | |
|---------------------------------|-----------------|--------|
| Fuel | Natural gas | LP gas |
| Max. rated heat output (KW) | 5.8 | 5.9 |
| Efficiency (%): | 94 | 93 |
| Energy efficiency classes: | A | |
| Space heated (m3) : | 80-140 | |
| Height (mm): | 725 | |
| Depth (mm): | 280+20* | |
| Width (mm): | 770 | |
| Weight (kg) : | 28.5 | |
| Gas connection: | G1/2" | |
| Flue outlet type: | direct vent | |
| Flue outlet diameter (mm): | 97 | |
| Material of combustion chamber: | steel | |
| Colours: | beige and white | |

*Depth of thermostat



GF26 ErP / GF36 ErP WALL HEATER

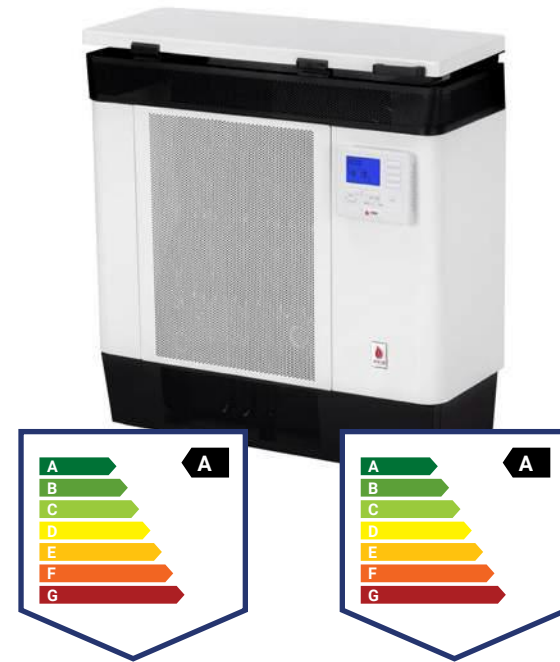


| Device model: | GF26 ErP | | GF36 ErP | |
|--------------------------------|-------------|--------|-------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output (KW) | 3.0 | 3.0 | 4 | 4 |
| Efficiency (%): | 94 | 94 | 94 | 94 |
| Energy efficiency class: | A | | A | |
| Space heated (m3): | 40-70 | | 60-80 | |
| Height (mm) | 710 | | 710 | |
| Depth (mm) | 345+20* | | | |
| Width: (mm) | 500 | | 632 | |
| Weight (kg) | 20 | | 24 | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | | | |
| Flue outlet diameter (mm) | 97 | | | |
| Material of combustion chamber | steel | | | |
| Colours | beige | | | |

*Depth of thermostat





ZEUSZ F8.50 ErP WALL HEATER



| Device model: | ZEUSZ F8.50F ErP | | ZEUSZ F8.50P ErP | |
|--------------------------------|------------------|--------|------------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max . rated heat output (KW) | 5.6 | 5.6 | 5.7 | 5.7 |
| Efficiency(%): | 94 | 94 | 82 | 82 |
| Energy efficiency class: | B | | C | |
| Space heated (m3): | 80-170 | | | |
| Height (mm) | 710 | | 720 | |
| Depth (mm) | 371 | | 450 | |
| Width: (mm) | 840 | | | |
| Weight (kg) | 34 | | 32 | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | | chimney | |
| Flue outlet diameter (mm) | 97 | | 76 | |
| Material of combustion chamber | steel | | | |
| Colours | white , black | | | |





ZEUSZ GF35 ErP WALL HEATER



| Device model: | ZEUSZ GF35F ErP | | ZEUSZ GF35P ErP | |
|--------------------------------|-----------------|--------|-----------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output (KW) | 4.0 | 4.0 | 3.6 | 3.7 |
| Efficiency(%): | 93 | 93 | 84 | 84 |
| Energy efficiency class: | B | | C | |
| Space heated (m3): | 60-80 | | | |
| Height (mm) | 710 | | 700 | |
| Depth (mm) | 335 | | 400 | |
| Width: (mm) | 706 | | | |
| Weight (kg) | 24 | | 28.5 | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | | chimney | |
| Flue outlet diameter (mm) | 97 | | 76 | |
| Material of combustion chamber | steel | | | |
| Colours | white, black | | | |



F8.50 ErP WALL HEATER




LIABILITY • ENERGY EFFICIENCY • GUARANTEE



| Device model: | F8.50F ErP | | F8.50P ErP | |
|--------------------------------|-------------|--------|-------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output (KW) | 5.3 | 5.5 | 5.1 | 5.1 |
| Efficiency (%): | 94 | 95 | 86 | 85 |
| Energy efficiency clas: | B | | C | |
| Space heated: | 80-140 | | | |
| Height (mm) | 710 | | 710 | |
| Depth (mm) | 280 | | 385 | |
| Width: (mm) | 770 | | | |
| Weight (kg) | 28.5 | | 25 | |
| Gas connection | G/2" | | | |
| Flue outlet type | direct vent | | chimney. | |
| Flue outlet diameter (mm) | 97 | | 76 | |
| Material of combustion chamber | steel | | | |
| Colours | beige | | | |




GF35 ErP WALL HEATER

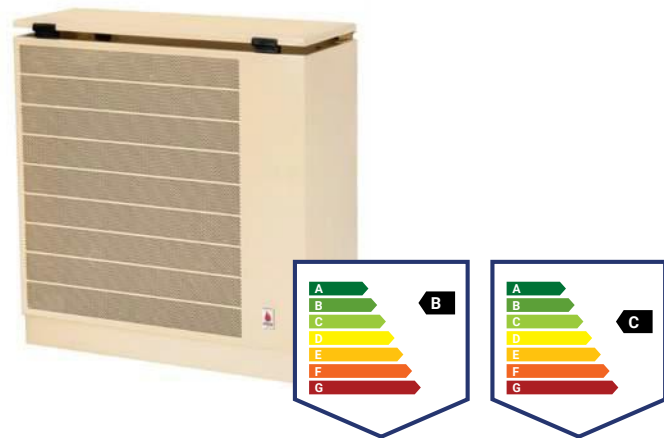

| Device model: | GF35F ErP | | GF35P ErP | |
|---------------------------------|-------------|--------|-------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output (kW) | 4.0 | 4.0 | 3.8 | 3.8 |
| Efficiency (%) | 94 | 96 | 88 | 88 |
| Energy efficiency class: | B | | C | |
| Space heated (m ³): | 60-80 | | | |
| Height (mm) | 700 | | 660 | |
| Depth (mm) | 310 | | 395 | |
| Width (mm) | 630 | | | |
| Weight (kg) | 24 | | 24 | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | | chimney | |
| Flue outlet diameter (mm) | 97 | | 76 | |
| Material of combustion chamber | steel | | | |
| Colours | beige | | | |

GF40 ErP WALL HEATER


| Device model: | GF40F ErP | | GF40P ErP | |
|---------------------------------|-------------|--------|-------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output (kW) | 3.9 | 4.0 | 3.8 | 3.8 |
| Efficiency (%) | 94 | 96 | 88 | 85 |
| Energy efficiency class: | B | | C | |
| Space heated (m ³): | 60-80 | | | |
| Height (mm) | 685 | | 660 | |
| Depth (mm) | 310 | | 440 | |
| Width (mm) | 630 | | | |
| Weight (kg) | 44 | | 44 | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | | chimney | |
| Flue outlet diameter (mm) | 97 | | 76 | |
| Material of combustion chamber | casting | | | |
| Alapszín | beige | | | |

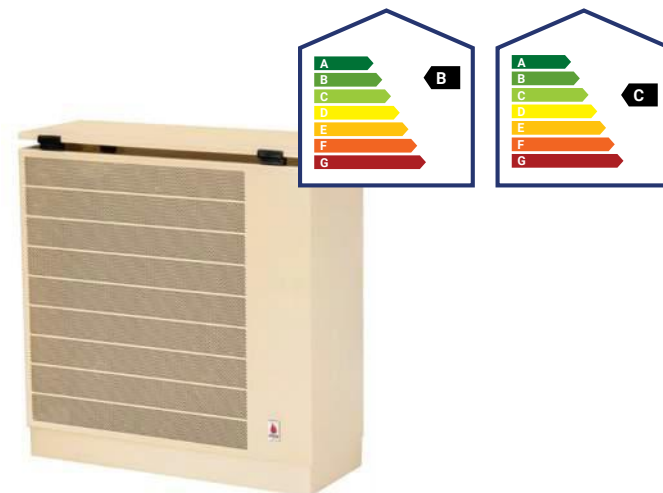

LIABILITY • ENERGY EFFICIENCY • GUARANTEE




GF25 ErP WALL HEATER

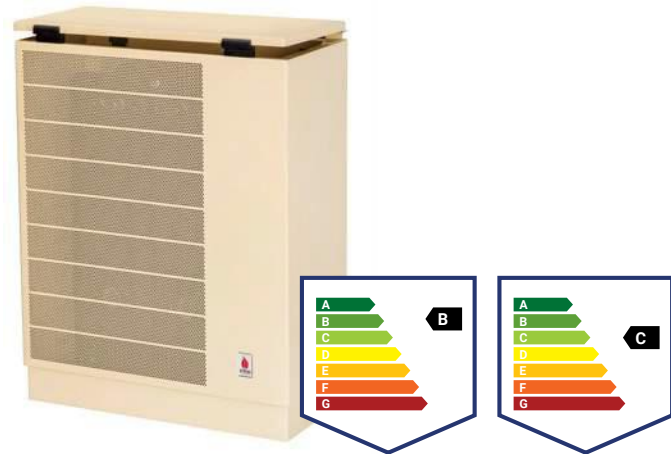

| Device model: | GF25F ErP | | GF25P ErP | |
|--------------------------------|-------------|----------|-------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output | 2.95 | 3.0 | 2.9 | 2.9 |
| Efficiency (%) | 95 | 95 | 94 | 93 |
| Energy efficiency class: | B | | C | |
| Space heated (m3): | 40-70 | | | |
| Height (mm) | 700 | | | |
| Depth (mm) | 310 | 395 | | |
| Width : (mm) | 500 | | | |
| Weight (kg) | 20 | 20 | | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | chimney. | | |
| Flue outlet diameter (mm) | 97 | 76 | | |
| Material of combustion chamber | steel | | | |
| Colours | beige | | | |

GF30 ErP WALL HEATER


| Device model: | GF30F ErP | | GF30P ErP | |
|--------------------------------|-------------|---------|-------------|--------|
| Fuel | Natural gas | LP gas | Natural gas | LP gas |
| Max. rated heat output (kW) | 3.0 | 3.1 | 2.9 | 2.9 |
| Efficiency | 94 | 95 | 85 | 88 |
| Energy efficiency class | B | | C | |
| Space heated (m3): | 40-70 | | | |
| Height (mm) | 685 | 660 | | |
| Depth (mm) | 310 | 440 | | |
| Width: (mm) | 500 | | | |
| Weight (kg) | 34 | 34 | | |
| Gas connection | G1/2" | | | |
| Flue outlet type | direct vent | chimney | | |
| Flue outlet diameter (mm) | 97 | 76 | | |
| Material of combustion chamber | casting | | | |
| Colours | beige | | | |

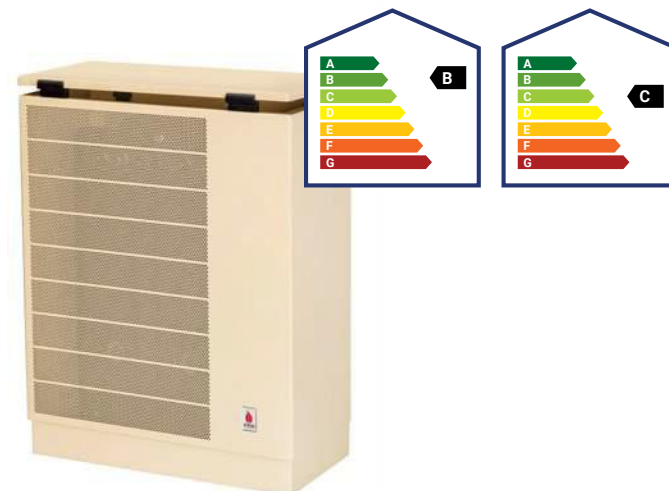

LIABILITY • ENERGY EFFICIENCY • GUARANTEE




EURO FK25 WALL HEATER



| Device model: | EURO FK25 | |
|--------------------------------|--------------|--------|
| Fuel | Natural gas | LP gas |
| Max. rated heat output (KW) | 2.7 | 2.9 |
| Efficiency (%): | 90 | 91 |
| Energy efficiency class: | C | |
| Space heated: | 40-70 | |
| Height (mm) | 810 | |
| Depth (mm) | 183 | |
| Width: (mm) | 392 | |
| Weight (kg) | 16 | |
| Gas connection | G1/2" | |
| Flue outlet type | chimney. | |
| Flue outlet diameter (mm) | 60 | |
| Material of combustion chamber | steel | |
| Colours | beige, white | |



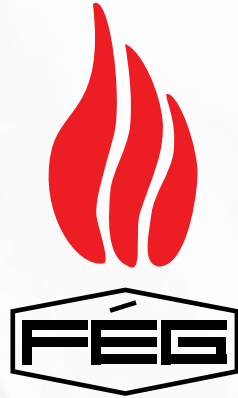

Your partner: